


NPFSR-K122AMD

3X ÓY Y G3 SQSG 3XW
X2NO+2NC

v "Q	
h я	24V AC/DC
я к I	0.85 ~ 1.1
Г Л ' ,	50Hz ~ 60Hz
Q ã	≤ 2.2W/24V DC, ≤ 5.4VA/24V AC
3 Л	≤ 50mA/24V DC
M 1	≤ 15Ω
3 :	PNP
е "Q	2NO+2NC
е 1 3	
е α	AgSnO ₂ +0.2μmAu
е к	AC-15: 5A/230V, DC-13: 5A/24V
е R w 3 Ĩ	10A gL/gG(NO), 6A gL/gG(NC)
т Н	: ≤ 300ms, : ≤ 150ms
Q Н	: ≤ 30ms, : ≤ 100ms
Q ч Н	: ≤ 30ms, : ≤ 100ms
Q ~ Н A Ą	20ms
. Л к	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
h Л я	250V AC
h' ` ã Р я	6000V(1.2/50us)
Л А Ÿ	1500V AC, 1 min
↔ = к "	IEC 60947-1
	10Hz ~ 55Hz, 0.35mm
я ч 1	III
/ ... ч 1	2
ĩ ч 1	IP20
† Ä □ Ÿ	-20°C ~ +60°C
Č □ Ÿ	-40°C ~ +80°C
≡ ð Ÿ	≤ 2000 m
4 m u	10×10 ⁶ cycles

g.

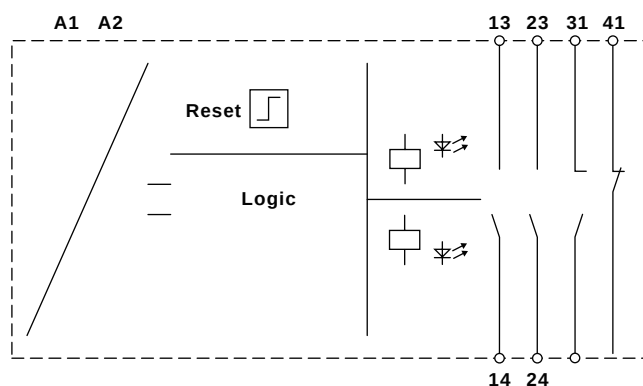

G 3 v "Q

ó ч 1	PLe, ISO 13849
G 3 1.	Cat.4, ISO 13849
γ Н	20 , ISO 13849
W z Ą ~ ' ,	99%, ISO 13849
W z и , Q Н	164 , ISO 13849
H t , Q	68, ISO 13849
G 3 H Q ó ч 1	SIL3, IEC 61508
φ " G 3 H Q ó ч 1	SIL CL3, IEC 62061
. Т Q Ÿ	1, IEC 62061
G 3, Q' "Q	≥ 99%, IEC 62061
ð Н и , Q Ñ ' ,	1.29×10 ⁻⁵ /PTI=20 IEC 62061
½ η Н и , Q Ñ ' ,	1.49×10 ⁻¹⁰ 1/h, IEC 62061
Ÿ ß 1.	0, IEC 60204